


| d1         | L      |  | code              |  |  | d2  | k    |  |  |
|------------|--------|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            | mm     | mm                                                                                |                   |                                                                                   | mm                                                                                | mm  | mm   | N                                                                                   | N                                                                                   |
| <b>3.0</b> | x 5.0  | 0.5 - 1.5                                                                         | <b>R1041-3005</b> | 500                                                                               | 3,1                                                                               | 6.3 | 1.00 | 1100                                                                                | 950                                                                                 |
|            | x 6.0  | 1.5 - 3.0                                                                         | <b>R1041-3006</b> | 500                                                                               | 3,1                                                                               | 6.3 | 1.00 | 1100                                                                                | 950                                                                                 |
|            | x 8.0  | 3.0 - 5.0                                                                         | <b>R1041-3008</b> | 500                                                                               | 3,1                                                                               | 6.3 | 1.00 | 1100                                                                                | 950                                                                                 |
|            | x 10.0 | 5.0 - 7.0                                                                         | <b>R1041-3010</b> | 500                                                                               | 3,1                                                                               | 6.3 | 1.00 | 1100                                                                                | 950                                                                                 |
|            | x 12.0 | 7.0 - 9.0                                                                         | <b>R1041-3012</b> | 500                                                                               | 3,1                                                                               | 6.3 | 1.00 | 1100                                                                                | 950                                                                                 |
|            | x 14.0 | 9.0 - 11.0                                                                        | <b>R1041-3014</b> | 500                                                                               | 3,1                                                                               | 6.3 | 1.00 | 1100                                                                                | 950                                                                                 |
|            | x 18.0 | 10.0 - 14.0                                                                       | <b>R1041-3018</b> | 500                                                                               | 3,1                                                                               | 6.3 | 1.00 | 1100                                                                                | 950                                                                                 |
| <b>3.2</b> | x 6.0  | 1.5 - 3.0                                                                         | <b>R1041-3206</b> | 500                                                                               | 3,3                                                                               | 6.3 | 1.00 | 1200                                                                                | 1100                                                                                |
|            | x 8.0  | 3.0 - 5.0                                                                         | <b>R1041-3208</b> | 500                                                                               | 3,3                                                                               | 6.3 | 1.00 | 1200                                                                                | 1100                                                                                |
|            | x 10.0 | 5.0 - 7.0                                                                         | <b>R1041-3210</b> | 500                                                                               | 3,3                                                                               | 6.3 | 1.00 | 1200                                                                                | 1100                                                                                |
|            | x 12.0 | 7.0 - 9.0                                                                         | <b>R1041-3212</b> | 500                                                                               | 3,3                                                                               | 6.3 | 1.00 | 1200                                                                                | 1100                                                                                |
|            | x 14.0 | 9.0 - 11.0                                                                        | <b>R1041-3214</b> | 500                                                                               | 3,3                                                                               | 6.3 | 1.00 | 1200                                                                                | 1100                                                                                |
|            | x 16.0 | 11.0 - 13.0                                                                       | <b>R1041-3216</b> | 500                                                                               | 3,3                                                                               | 6.3 | 1.00 | 1200                                                                                | 1100                                                                                |
|            | x 18.0 | 13.0 - 15.0                                                                       | <b>R1041-3218</b> | 500                                                                               | 3,3                                                                               | 6.3 | 1.00 | 1200                                                                                | 1100                                                                                |
| <b>4.0</b> | x 6.0  | 0.5 - 2.5                                                                         | <b>R1041-4006</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 8.0  | 2.5 - 4.5                                                                         | <b>R1041-4008</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 10.0 | 4.5 - 6.5                                                                         | <b>R1041-4010</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 12.0 | 6.5 - 8.5                                                                         | <b>R1041-4012</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 14.0 | 8.5 - 10.5                                                                        | <b>R1041-4014</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 16.0 | 10.5 - 12.5                                                                       | <b>R1041-4016</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 18.0 | 12.5 - 14.5                                                                       | <b>R1041-4018</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 20.0 | 14.5 - 16.5                                                                       | <b>R1041-4020</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 24.0 | 17.0 - 19.0                                                                       | <b>R1041-4024</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 26.0 | 19.0 - 21.0                                                                       | <b>R1041-4026</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
|            | x 30.0 | 21.0 - 25.0                                                                       | <b>R1041-4030</b> | 250                                                                               | 4,1                                                                               | 8.0 | 1.30 | 2200                                                                                | 1700                                                                                |
| <b>4.8</b> | x 6.0  | 1.0 - 2.5                                                                         | <b>R1041-4806</b> | 500                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 8.0  | 2.5 - 4.5                                                                         | <b>R1041-4808</b> | 500                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 10.0 | 4.5 - 6.0                                                                         | <b>R1041-4810</b> | 500                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 12.0 | 6.0 - 8.0                                                                         | <b>R1041-4812</b> | 500                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 14.0 | 8.0 - 10.0                                                                        | <b>R1041-4814</b> | 500                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 16.0 | 10.0 - 11.5                                                                       | <b>R1041-4816</b> | 500                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 18.0 | 11.5 - 13.5                                                                       | <b>R1041-4818</b> | 500                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 20.0 | 13.5 - 15.0                                                                       | <b>R1041-4820</b> | 250                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 22.0 | 15.0 - 17.0                                                                       | <b>R1041-4822</b> | 250                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 25.0 | 17.0 - 20.0                                                                       | <b>R1041-4825</b> | 250                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 28.0 | 20.0 - 23.0                                                                       | <b>R1041-4828</b> | 250                                                                               | 4,9                                                                               | 9.5 | 1.40 | 3100                                                                                | 2900                                                                                |

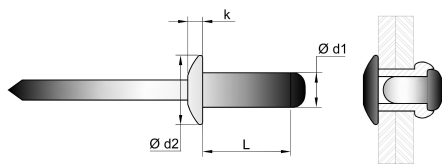

| d1         | L      |  | code              |  |  | d2   | k    |  |  |
|------------|--------|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            | mm     | mm                                                                                |                   |                                                                                   | mm                                                                                | mm   | mm   | N                                                                                   | N                                                                                   |
| <b>4.8</b> | x 30.0 | 23.0 - 26.0                                                                       | <b>R1041-4830</b> | 250                                                                               | 4,9                                                                               | 9.5  | 1.40 | 3100                                                                                | 2900                                                                                |
|            | x 35.0 | 25.0 - 30.0                                                                       | <b>R1041-4835</b> | 250                                                                               | 4,9                                                                               | 9.5  | 1.40 | 3100                                                                                | 2900                                                                                |
| <b>5.0</b> | x 8.0  | 2.5 - 4.0                                                                         | <b>R1041-5008</b> | 500                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 10.0 | 4.0 - 6.0                                                                         | <b>R1041-5010</b> | 500                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 12.0 | 6.0 - 8.0                                                                         | <b>R1041-5012</b> | 500                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 14.0 | 8.0 - 10.0                                                                        | <b>R1041-5014</b> | 500                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 16.0 | 10.0 - 11.5                                                                       | <b>R1041-5016</b> | 500                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 18.0 | 11.5 - 13.5                                                                       | <b>R1041-5018</b> | 500                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 20.0 | 13.5 - 15.0                                                                       | <b>R1041-5020</b> | 250                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 25.0 | 17.0 - 20.0                                                                       | <b>R1041-5025</b> | 250                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
|            | x 30.0 | 20.0 - 25.0                                                                       | <b>R1041-5030</b> | 250                                                                               | 5,1                                                                               | 9.5  | 1.40 | 4000                                                                                | 3100                                                                                |
| <b>6.0</b> | x 10.0 | 2.5 - 4.0                                                                         | <b>R1041-6010</b> | 250                                                                               | 6,1                                                                               | 12.0 | 1.90 | 4800                                                                                | 4300                                                                                |
|            | x 12.0 | 3.5 - 6.5                                                                         | <b>R1041-6012</b> | 250                                                                               | 6,1                                                                               | 12.0 | 1.90 | 4800                                                                                | 4300                                                                                |
|            | x 15.0 | 6.5 - 9.5                                                                         | <b>R1041-6015</b> | 250                                                                               | 6,1                                                                               | 12.0 | 1.90 | 4800                                                                                | 4300                                                                                |
|            | x 18.0 | 9.5 - 12.5                                                                        | <b>R1041-6018</b> | 250                                                                               | 6,1                                                                               | 12.0 | 1.90 | 4800                                                                                | 4300                                                                                |
|            | x 22.0 | 13.5 - 16.5                                                                       | <b>R1041-6022</b> | 250                                                                               | 6,1                                                                               | 12.0 | 1.90 | 4800                                                                                | 4300                                                                                |
|            | x 26.0 | 17.5 - 20.5                                                                       | <b>R1041-6026</b> | 250                                                                               | 6,1                                                                               | 12.0 | 1.90 | 4800                                                                                | 4300                                                                                |
|            | x 30.0 | 21.5 - 24.5                                                                       | <b>R1041-6030</b> | 250                                                                               | 6,1                                                                               | 12.0 | 1.90 | 4800                                                                                | 4300                                                                                |
| <b>6.4</b> | x 8.0  | 1.0 - 3.0                                                                         | <b>R1041-6408</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |
|            | x 10.0 | 3.0 - 4.0                                                                         | <b>R1041-6410</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |
|            | x 12.0 | 3.5 - 6.5                                                                         | <b>R1041-6412</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |
|            | x 15.0 | 6.5 - 9.5                                                                         | <b>R1041-6415</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |
|            | x 18.0 | 9.5 - 12.5                                                                        | <b>R1041-6418</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |
|            | x 22.0 | 14.5 - 16.5                                                                       | <b>R1041-6422</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |
|            | x 26.0 | 18.5 - 20.5                                                                       | <b>R1041-6426</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |
|            | x 30.0 | 22.5 - 24.0                                                                       | <b>R1041-6430</b> | 250                                                                               | 6,5                                                                               | 13.0 | 2.20 | 5700                                                                                | 4900                                                                                |